


## DS-2CE56H1T-(A)ITZ 5 MP HD Motorized VF EXIR Dome Camera



### Key Features

- 5 megapixel high-performance CMOS
- HD analog output, up to 5 MP resolution
- 2.8 to 12 mm motorized vari-focal lens
- True Day/Night
- OSD menu, DNR, Smart IR
- EXIR technology, up to 30 m IR distance
- IP65
- Up the Coax(HIKVISION-C)

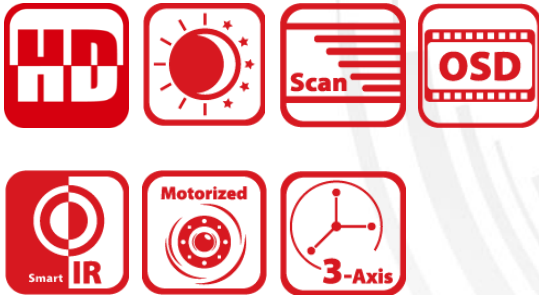


## Specifications

<b>Camera</b>	
Image Sensor	5 MP CMOS image sensor
Effective Pixels	2592 (H) × 1944 (V)
Min. illumination	Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50,000 s NTSC: 1/30 s to 1/50,000 s
Lens	Motorized VF lens; 2.8 to 12 mm
Horizontal Field of View	27.7° to 86.8° (2.8 to 12 mm)
Lens Mount	φ14
Day & Night	ICR
Angle Adjustment	Pan: 0° to 355°; Tilt: 0° to 75°; Rotate: 0° to 355°
Synchronization	Internal synchronization
Video Frame Rate	2592 × 1944 @ 20fps
HD Video Output	1 HD analog output
<b>Menu</b>	
AGC	Support
D/N Mode	Auto/Color/BW (Black and White)
White Balance	ATW/MWB
BLC	Support
Language	English, Chinese
Functions	Brightness, Sharpness, Digital noise reduction, Mirror, Bad pixel correction, Smart IR
<b>General</b>	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)
Power Supply	12 VDC ± 20% -A: 12 VDC ± 20% 24 VAC ± 20%
Power Consumption	Max. 4.5 W -A: Max. 6.5 W
Protection Level	IP65
IR Range	Up to 30 m
Communication	Up the coax, Protocol: HIKVISION-C (TVI output)
Dimensions	Φ 136 mm × 102 mm (Φ 5.35" × 4.02")
Weight	Approx. 600 g (1.32 lb.)

## Order Models

DS-2CE56H1T-ITZ, DS-2CE56H1T-AITZ

## Dimensions

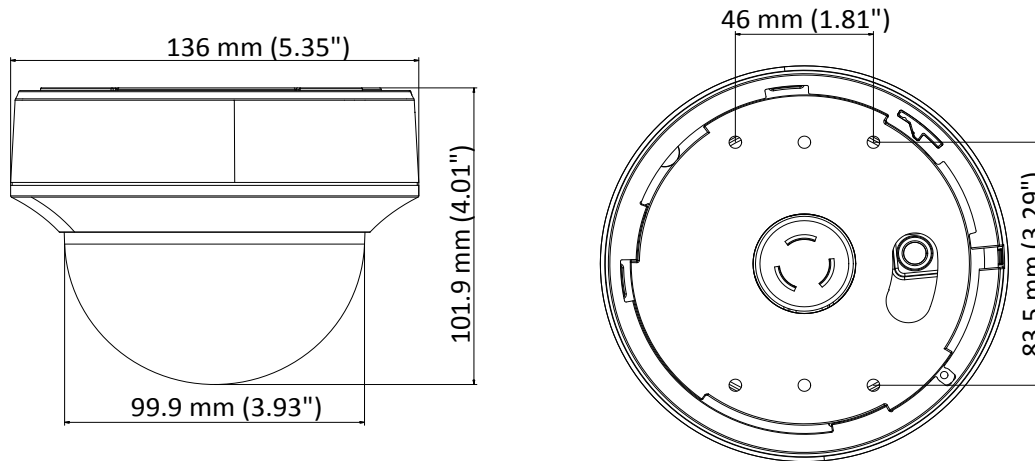

## Accessories



DS-1275ZJ

Vertical Pole Mounting Bracket



DS-1273ZJ-130B

Wall Mounting Bracket



DS-1271ZJ-130

Pendant Mounting Bracket



DS-1276ZJ

Corner Mounting Bracket



DS-1273ZJ-130

Wall Mounting Bracket



DS-1249ZJ

In-ceiling Mounting Bracket



DS-1H18

Video Balun

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761